
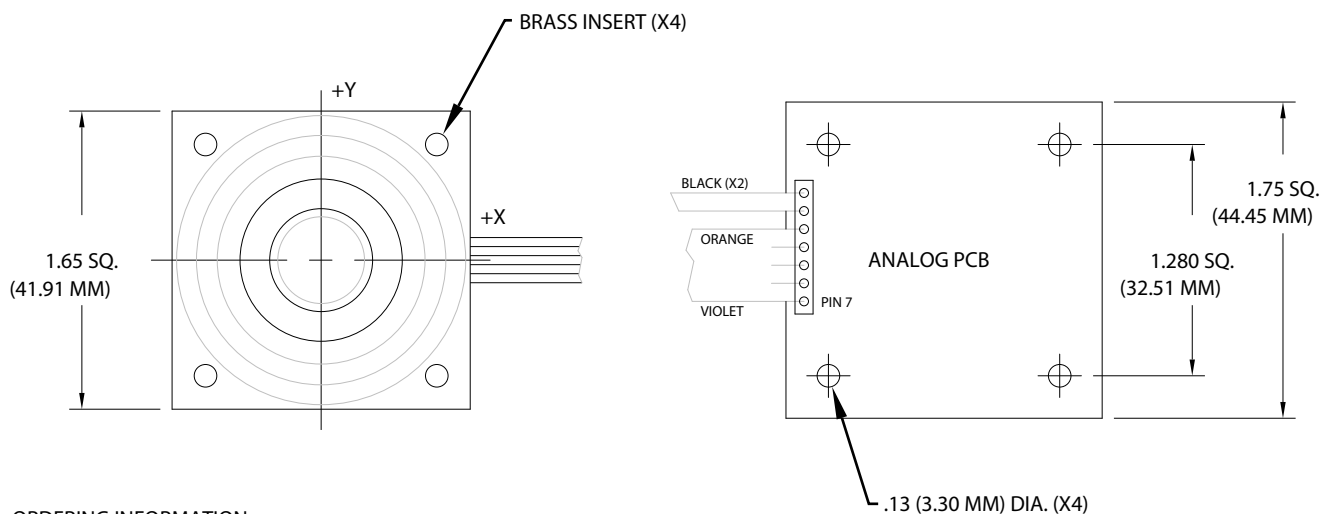


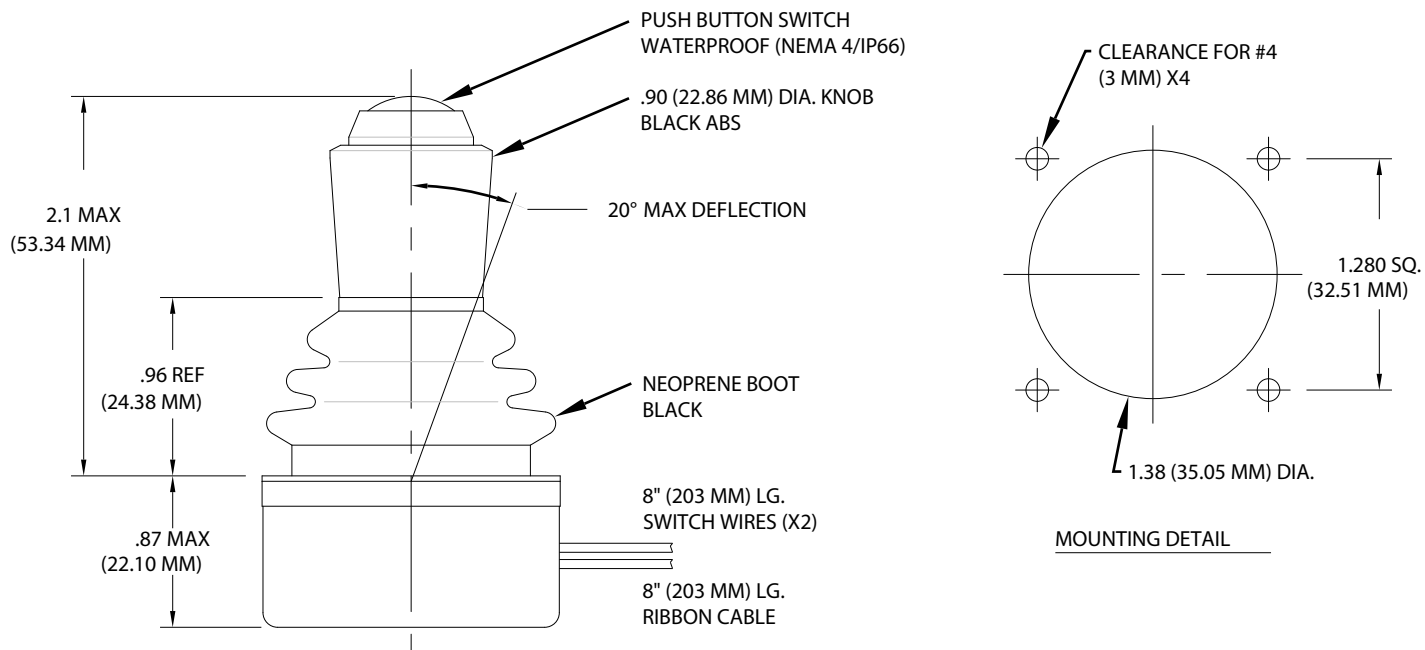

ORDERING INFORMATION:

- 1 4-40 THREADED INSERTS
2 WITHOUT THREADED INSERTS, ROUND BODY (SPECIAL ORDER ONLY)
3 3 MM THREADED INSERTS
- Z CONFORMAL COATING
DZ LOW TEMP AND CONFORMAL COATING
R CONDUCTIVE BOOT
RF CONDUCTIVE BOOT AND FERRITE BEAD
E WITHOUT DEADBAND
- 0 STANDARD 2 AXES
5 FRICTION HELD 2 AXES
6 SINGLE AXIS
7 FRICTION HELD 1 AXIS
- 0 WITHOUT NEUTRAL SWITCH
1 NEUTRAL SWITCH (AVAILABLE ON +5V MODELS ONLY)

- 0 +12V IN, 3 TO 9V OUT
1 +5V IN, 1.25 TO 3.75V OUT
2 +/-5V IN, +/-5V OUT
3 +/-12V IN, +/-10V OUT
4 +5V IN, 0.5 TO 4.5V OUT
5 +5V IN, 0 TO 5V OUT
6 +/-10V IN, +/-10V OUT
REF DWG. A761718 FOR ELECTRICAL DETAILS

CTI ELECTRONICS CORPORATION	
110 Old South Ave, Stratford, CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctielectronics.com	
TITLE: MODEL F1000-N3 SERIES	
REV. E DATE: 11-21-07	A 761685
APPROVED: S.SZERSZEN	